



CATENA OE A PERNI FORATI HP

CHAIN OE HOLLOW PINS HP

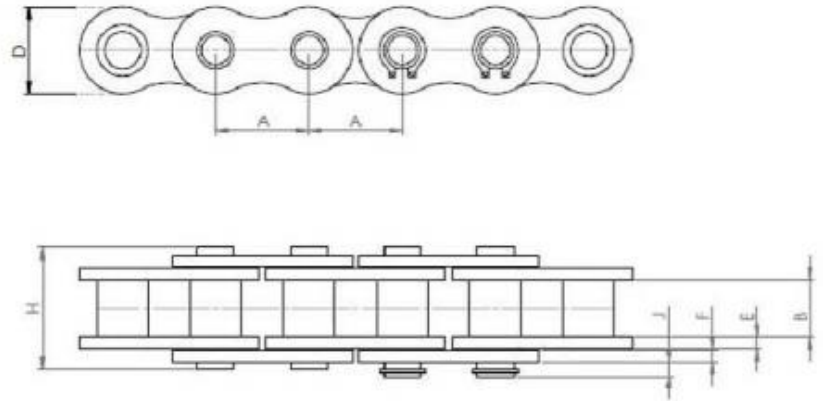

ISO STANDARD

CHAIN CODE	REF.	A - PITCH (MM)	B - INSIDE WIDTH	C - ROLLER DIAM MIN	D - PLATE HEIGHT MAX	E - PLATE WIDTH INNER MAX	F - PLATE WIDTH OUTER MAX	G - PIN DIAM. MAX	H1 - PIN LENGTH MAX	J - CONN. LINK EXTENSION MAX	DIAMETRO FORO	ISO606 TENSILE STRENGTH (NEWTONS) MIN	ISO606 TENSILE STRENGTH (NEWTONS) MED	WEIGHT KG/M
4708B1800	08B1HP	12.700	7.750	8.510	12.100	0.000	0.000	0.000	16.500	1.100	4,5	12000	12000	0.660
470050800	50HP	15.875	9.530	10.160	15.100	0.000	0.000	0.000	20.400	1.300	5,1	18000	18000	1.000
470060800	60HP	19.050	12.700	11.910	17.200	0.000	0.000	0.000	25.300	1.300	6	28500	28500	1.390
4716B1800	16B1HP	25.400	17.020	15.880	21.000	0.000	0.000	0.000	30.800	1.300	7,05	40000	40000	2.200



OGNIBENE S.P.A. _ VIA DEL TIPOGRAFO, 6 _ 40138 BOLOGNA _ ITALY
 TEL: +39 051 534225 _ FAX: +39 051 535083
sales@ognibenechaintech.it _ www.ognibenechaintech.com