


PULEGGE SPA 5 gole

Pulley SPA 5 socket

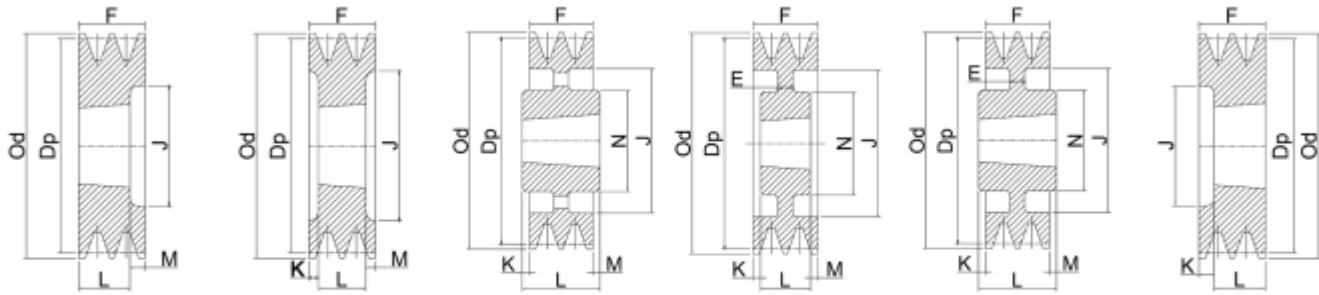

Tipo 2

Tipo 3

Tipo 4

Tipo 6

Tipo 7

Tipo 8

Pulegge SPA a 5 gole

Descrizione prodotto	Diam. primitivo Dp	Misura bussola	Foro max (bussola)	Diam. esterno Od	Tipo	E	F	J	K	L	M	N	kg
05SPA100	100	1615	42	105.5	2	-	80	70	-	38	42	-	2
05SPA106	106	2012	50	111.5	8	-	80	76	48	32	-	-	1.9
05SPA112	112	2012	50	117.5	8	-	80	80	48	32	-	-	2.4
05SPA118	118	2012	50	123.5	2	-	80	86	-	32	48	-	2.6
05SPA125	125	2012	50	130.5	3	-	80	92	24	32	24	-	3.15
05SPA132	132	2517	60	137.5	3	-	80	98	17.5	45	17.5	-	3.4
05SPA140	140	2517	60	145.5	3	-	80	106	17.5	45	17.5	-	4.55
05SPA150	150	2517	60	155.5	3	-	80	116	17.5	45	17.5	-	4.7
05SPA160	160	2517	60	165.5	3	-	80	126	17.5	45	17.5	-	5.7
05SPA170	170	2517	60	175.5	3	-	80	136	17.5	45	17.5	-	6.5
05SPA180	180	3020	75	185.5	3	-	80	146	14.5	51	14.5	-	6.6
05SPA190	190	3020	75	195.5	3	-	80	156	14.5	51	14.5	-	7.8
05SPA200	200	3020	75	205.5	3	-	80	165	14.5	51	14.5	-	9.1
05SPA212	212	3020	75	217.5	2	-	80	178	-	51	29	-	11
05SPA224	224	3020	75	229.5	2	-	80	189	-	51	29	-	12.2
05SPA236	236	3020	75	241.5	6	20	80	202	14.5	51	14.5	150	10.8
05SPA250	250	3020	75	255.5	6	16	80	215	14.5	51	14.5	150	10.4
05SPA280	280	3535	90	285.5	7	16	80	245	4.5	89	4.5	170	18.15
05SPA300	300	3535	90	305.5	7	16	80	265	4.5	89	4.5	170	17.9
05SPA315	315	3535	90	320.5	7	16	80	280	4.5	89	4.5	170	13.75
05SPA355	355	3535	90	360.5	4	-	80	320	4.5	89	4.5	170	23.2
05SPA400	400	3535	90	405.5	4	-	80	365	4.5	89	4.5	170	20.5
05SPA450	450	3535	90	455.5	4	-	80	415	4.5	89	4.5	170	29.25
05SPA500	500	3535	90	505.5	4	-	80	465	4.5	89	4.5	170	34
05SPA560	560	3535	90	565.5	4	-	80	525	4.5	89	4.5	170	41.2
05SPA630	630	3535	90	635.5	4	-	80	595	4.5	89	4.5	170	43.8
05SPA800	800	4040	100	805.5	4	-	80	765	11	102	11	200	64