


PULEGGE SPC 5 gole

Pulley SPC 5 socket

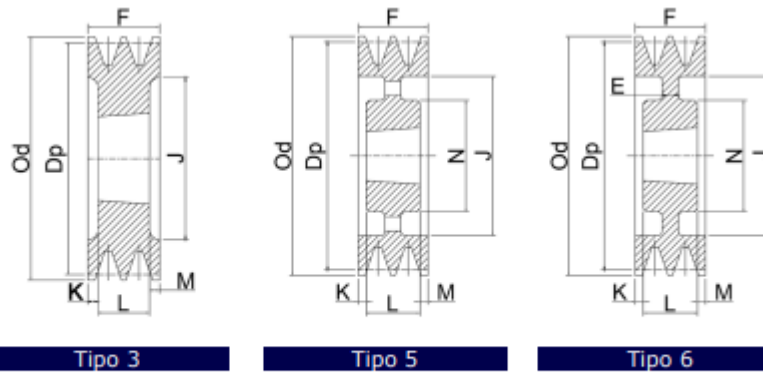

Pulegge SPC a 5 gole

Descrizione prodotto	Diam. primitivo Dp	Misura bussola	Foro max (bussola)	Diam. esterno Od	Tipo	E	F	J	K	L	M	N	kg
05SPC200	200	3535	90	209.6	3	-	136	150	23.5	89	23.5	-	12.6
05SPC212	212	3535	90	221.6	3	-	136	160	23.5	89	23.5	-	17.2
05SPC224	224	3535	90	233.6	3	-	136	173	23.5	89	23.5	-	18.6
05SPC236	236	3535	90	245.6	3	-	136	185	23.5	89	23.5	-	19
05SPC250	250	3535	90	259.6	3	-	136	198	23.5	89	23.5	-	23.5
05SPC265	265	3535	90	274.6	3	-	136	213	23.5	89	23.5	-	29.2
05SPC280	280	3535	90	289.6	3	-	136	228	23.5	89	23.5	-	33.1
05SPC300	300	3535	90	309.6	6	20	136	247	23.5	89	23.5	170	27.8
05SPC315	315	3535	90	324.6	6	20	136	264	23.5	89	23.5	170	28.6
05SPC335	335	3535	90	344.6	6	20	136	280	23.5	89	23.5	170	31.35
05SPC355	355	3535	90	364.6	6	20	136	304	23.5	89	23.5	170	34.5
05SPC375	375	3535	90	384.6	5	-	136	324	23.5	89	23.5	170	39.2
05SPC400	400	3535	90	409.6	5	-	136	344	23.5	89	23.5	170	39.5
05SPC425	425	3535	100	434.6	5	-	136	369	17	102	17	200	45.7
05SPC450	450	4040	100	459.6	5	-	136	394	17	102	17	200	48
05SPC475	475	4040	100	484.6	5	-	136	419	17	102	17	200	51.5
05SPC500	500	4040	100	509.6	5	-	136	444	17	102	17	200	68.2
05SPC530	530	4040	100	539.6	5	-	136	474	17	102	17	200	67.1
05SPC560	560	4545	110	569.6	5	-	136	504	11	114	11	225	71.5
05SPC630	630	5050	125	639.6	5	-	136	574	4.5	127	4.5	245	94.5
05SPC710	710	5050	125	719.6	5	-	136	654	4.5	127	4.5	245	108.5
05SPC800	800	5050	125	809.6	5	-	136	737	4.5	127	4.5	245	124.7
05SPC1000	1.000	5050	125	1009.6	5	-	136	937	4.5	127	4.5	245	157
05SPC1250	1250	5050	125	1259.6	5	-	136	1187	4.5	127	4.5	245	212

*N.B. Il tipo 4 e 5 sono pulegge a raggi.
Le dimensioni non funzionali possono variare.*