


PULEGGE SPZ 1 gola

Pulley SPZ 1 socket

Pulegge SPZ a 1 gola

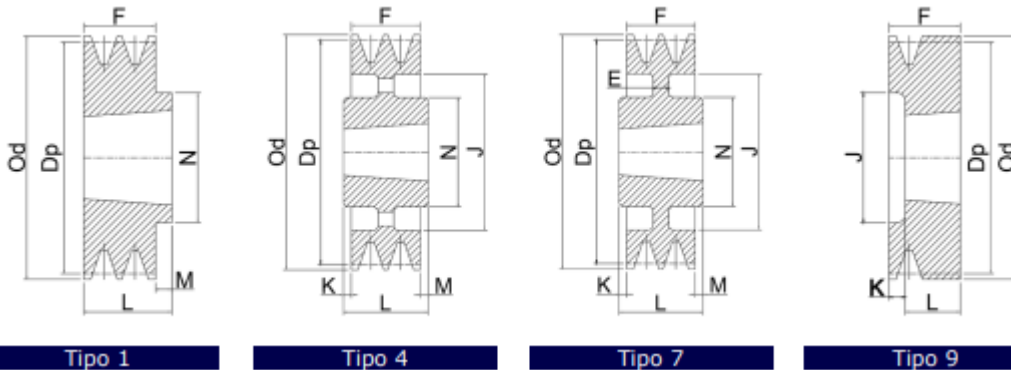

Descrizione prodotto	Diam. primitivo Dp	Misura bussola	Foro max (bussola)	Diam. esterno Od	Tipo	E	F	J	K	L	M	N	kg
01SPZ050	50	1008	25	54	9	-	37	28	13	24	-	-	0.4
01SPZ056	56	1008	25	60	9	-	37	32	13	24	-	-	0.5
01SPZ060	60	1008	25	64	9	-	22	-	-	22	-	-	0.3
01SPZ063	63	1108	28	67	1	-	16	-	-	22	6	62	0.4
01SPZ067	67	1108	28	71	1	-	16	-	-	22	6	62	0.35
01SPZ071	71	1108	28	75	1	-	16	-	-	22	6	62	0.4
01SPZ075	75	1108	28	80	1	-	16	-	-	22	6	62	0.45
01SPZ080	80	1210	32	84	1	-	16	-	-	25	9	75	0.5
01SPZ085	85	1210	32	89	1	-	16	-	-	25	9	75	0.6
01SPZ090	90	1210	32	94	1	-	16	-	-	25	9	75	0.7
01SPZ095	95	1210	32	99	1	-	16	-	-	25	9	75	0.75
01SPZ100	100	1210	32	104	1	-	16	-	-	25	9	75	0.85
01SPZ106	106	1610	42	110	1	-	16	-	-	25	9	80	0.85
01SPZ112	112	1610	42	116	1	-	16	-	-	25	9	80	1
01SPZ118	118	1610	42	122	1	-	16	-	-	25	9	80	1.25
01SPZ125	125	1610	42	129	1	-	16	-	-	25	9	80	1.3
01SPZ132	132	1610	42	136	1	-	16	-	-	25	9	80	1.45
01SPZ140	140	1610	42	144	1	-	16	-	-	25	9	80	1.52
01SPZ150	150	1610	42	154	1	-	16	-	-	25	9	80	1.9
01SPZ160	160	1610	42	164	1	-	16	-	-	25	9	80	2.1
01SPZ170	170	1610	42	170	1	-	16	-	-	25	9	80	2.45
01SPZ180	180	1610	42	184	7	8	16	152	-	25	9	80	2.8
01SPZ190	190	1610	42	194	7	8	16	161	-	25	9	80	2.2
01SPZ200	200	2012	50	204	7	8	16	172	-	32	16	100	2.8
01SPZ224	224	2012	50	228	4	-	16	196	-	32	16	100	3.65
01SPZ250	250	2012	50	254	4	-	16	222	8	32	8	100	3.6
01SPZ280	280	2012	50	284	4	-	16	252	8	32	8	100	4.1
01SPZ315	315	2012	50	319	4	-	16	287	8	32	8	100	4.1
01SPZ355	355	2012	50	359	4	-	16	326	8	32	8	112	5
01SPZ400	400	2012	50	404	4	-	16	371	8	32	8	112	6.1
01SPZ450	450	2517	60	454	4	-	16	421	14.5	45	14.5	120	7.4

N.B. Il tipo 4 e 5 sono pulegge a raggi.
Le dimensioni non funzionali possono variare.