


PULEGGE DENTATE 5 M L. 25

Pulley 5 M L. 25



CHAINS ITALY

5M
PASSO 5 mm
 PER CINGHIE LARGHEZZA 25 mm

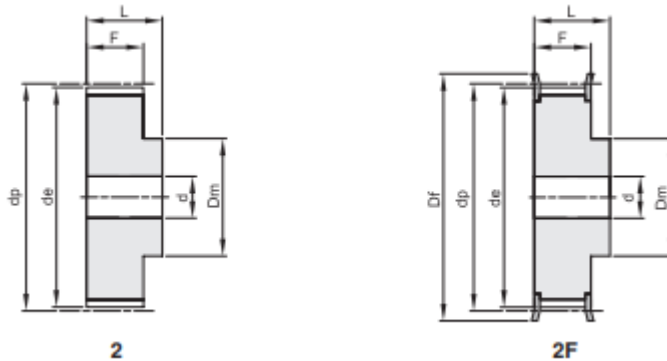

Materiale: Alluminio UNI 9006 - T6 (Al)
 adatto per l'ossidazione dura a spessore

tipo	materiale	denti	dp	de	Df	Dm	Di	F	L	d	n° flangia	Kg.
2F	St	12	19,10	17,96	23	12,5		30,5	36	6	202	0,05
2F	St	14	22,28	21,14	25	13,5		30,5	36	6	203	0,08
2F	St	15	23,87	22,73	28	16,0		30,5	36	6	204	0,09
2F	St	16	25,46	24,32	28	16,5		30,5	36	6	204	0,11
2F	St	18	28,65	27,51	32	20,0		30,5	36	6	205	0,13
2F	St	20	31,83	30,69	36	23,0		30,5	36	6	206	0,17
2F	St	21	33,42	32,28	38	24,0		30,5	38	6	207	0,20
2F	St	22	35,01	33,87	38	25,5		30,5	38	6	207	0,22
2F	St	24	38,20	37,06	42	27,0		30,5	38	6	208	0,26
2F	St	26	41,38	40,24	44	30,0		30,5	38	6	209	0,32
2F	St	28	44,56	43,42	48	30,5		30,5	38	6	210	0,37
2F	St	30	47,75	46,60	51	35,0		30,5	38	6	211	0,44
2F	St	32	50,93	49,79	54	38,0		30,5	38	8	212	0,48
2F	St	36	57,30	56,16	60	38,0		30,5	38	8	214	0,59
2F	St	40	63,66	62,52	71	38,0		30,5	38	8	217	0,75
2	Al	44	70,03	68,89		38,0		30,5	40	8		0,32
2	Al	48	76,39	75,25		38,0		30,5	40	8		0,28
2	Al	60	95,49	94,35		50,0		30,5	40	8		0,44
2	Al	72	114,59	113,45		50,0		30,5	40	8		0,85