


PULEGGE DENTATE T 5 L. 16

Pulley T 5 L. 16



CHAINS ITALY

T 5
PASSO 5 mm
 PER CINGHIA LARGHEZZA 16 mm

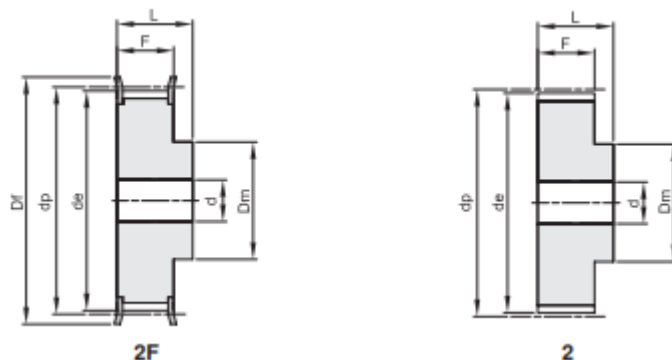

Materiale: Alluminio UNI 9006 - T6 (Al)
 adatto per l'ossidazione dura a spessore

tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
2F	Al	10	15,05	19,5	8	21	27		200	0,02
2F	Al	12	18,25	23	10	21	27		201	0,02
2F	Al	14	21,45	25	13	21	27		203	0,03
2F	Al	15	23,05	28	16	21	27		204	0,03
2F	Al	16	24,60	32	18	21	27		205	0,04
2F	Al	18	27,80	32	20	21	27		205	0,04
2F	Al	19	29,40	36	22	21	27		206	0,05
2F	Al	20	31,00	36	23	21	27		206	0,06
2F	Al	22	34,25	38	24	21	27		207	0,06
2F	Al	24	37,40	42	26	21	27		208	0,08
2F	Al	25	38,95	44	26	21	27		209	0,08
2F	Al	26	40,60	44	26	21	27		209	0,09
2F	Al	27	42,20	48	30	21	27	8	210	0,09
2F	Al	28	43,75	48	32	21	27	8	210	0,09
2F	Al	30	46,95	51	34	21	27	8	211	0,10
2F	Al	32	50,10	54	38	21	27	8	212	0,12
2F	Al	36	56,45	63	38	21	27	8	215	0,16
2F	Al	40	62,85	66	40	21	27	8	216	0,19
2F	Al	42	66,00	71	40	21	27	8	217	0,20
2	Al	44	69,20		45	21	27	8		0,23
2	Al	48	75,55		50	21	27	8		0,28
2	Al	60	94,65		65	21	27	8		0,43



OGNIBENE S.P.A. _ VIA DEL TIPOGRAFO, 6 _ 40138 BOLOGNA _ ITALY
 TEL: +39 051 534225 _ FAX: +39 051 535083
sales@ognibenechaintech.it _ www.ognibenechaintech.com