

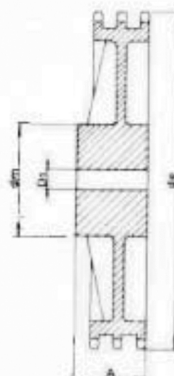



# INGRANAGGI IN GHISA TIPO G.26

## CAST IRON GEARS TYP G.26

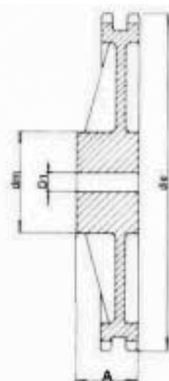

### 1" x 17,02 mm per catena a rullo secondo DIN 8180/8187 - ISO/R 606

Z	d <sub>e</sub>	d <sub>p</sub>	SEMPLICE			DOPPIO			TRIPLO			RUOTA	
			d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	mm	mm
30	254,0	243,00	110	30	65	125	40	75	145	40	90	Raggio dente r <sub>3</sub>	26
38	320,0	307,59	110	30	65	140	40	75	160	45	100	Larghezza raggio C	2,5
45	377,0	364,13	125	30	70	148	40	75	160	45	100	Spessore dente ruota B <sub>1</sub>	16,2
57	474,0	461,08	125	35	70	160	40	90	165	45	100	Spessore dente ruota b <sub>1</sub>	15,8
76	627,0	614,65	140	35	80	175	40	95	200	45	110	Spessore dente ruota B <sub>2</sub>	47,7
95	781,0	768,22	140	40	80	175	45	95	200	50	110	Spessore dente ruota B <sub>3</sub>	79,6
*114	933,0	921,81	150	40	80	175	45	95	200	50	115	CATENA	mm
											Passo	25,4	
											Larghezza interna	17,02	
											Rullo ∅	15,88	

### 1"1/4 x 3/4" per catena a rullo secondo DIN 8180/8187 - ISO/R 606

Z	d <sub>e</sub>	d <sub>p</sub>	SEMPLICE			DOPPIO			TRIPLO			RUOTA	
			d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	mm	mm
30	318,9	303,75	115	35	70	130	40	80	—	—	—	Raggio dente r <sub>3</sub>	32
38	399,6	384,49	125	35	70	140	45	90	180	56	110	Larghezza raggio C	3,5
45	470,3	455,17	125	35	70	140	45	90	—	—	—	Spessore dente ruota B <sub>1</sub>	18,5
57	591,5	576,36	135	40	80	160	50	100	180	63	125	Spessore dente ruota b <sub>1</sub>	18,2
76	783,5	768,32	140	50	90	180	56	100	—	—	—	Spessore dente ruota B <sub>2</sub>	54,6
											Spessore dente ruota B <sub>3</sub>	91	
											CATENA	mm	
											Passo	31,75	
											Larghezza interna	19,56	
											Rullo ∅	19,05	

### 1"1/2 x 1" per catena a rullo secondo DIN 8180/8187 - ISO/R 606

Z	d <sub>e</sub>	d <sub>p</sub>	SEMPLICE			DOPPIO			TRIPLO			RUOTA	
			d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	d <sub>m</sub>	D <sub>1</sub>	A	mm	mm
30	379,5	364,50	130	40	85	—	—	—	—	—	—	Raggio dente r <sub>3</sub>	38
38	476,2	461,39	140	45	90	180	45	100	200	63	150	Larghezza raggio C	4
45	561,2	546,20	140	45	90	—	—	—	—	—	—	Spessore dente ruota B <sub>1</sub>	24,1
57	706,5	691,63	160	45	100	200	55	110	200	63	150	Spessore dente ruota b <sub>1</sub>	23,6
76	936,9	921,98	170	45	100	220	55	120	250	70	150	Spessore dente ruota B <sub>2</sub>	72
											Spessore dente ruota B <sub>3</sub>	120,3	
											CATENA	mm	
											Passo	38,1	
											Larghezza interna	25,4	
											Rullo ∅	25,4	