

PULEGGE DENTATE L 100

Pulley L 100




CHAINS ITALY

L 100

PASSO 3/8" (9,525 mm)

PER CINGHIE LARGHEZZA 1" (25,4 mm)

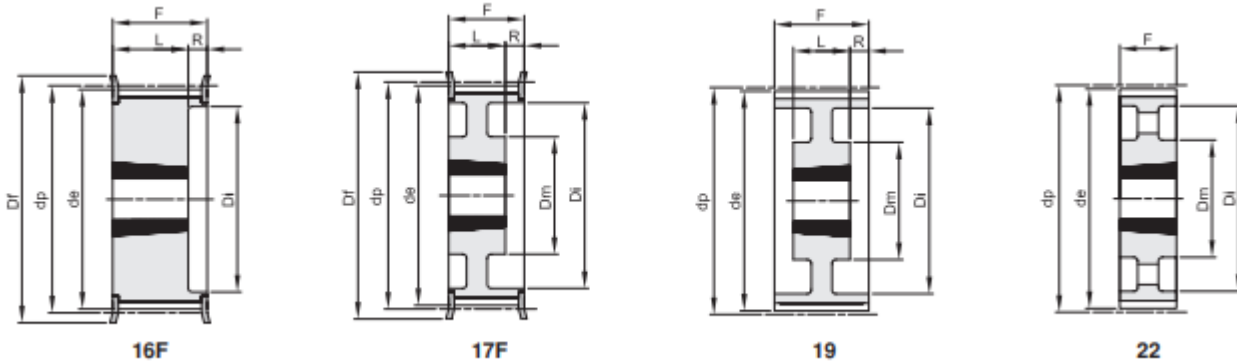

Materiale: Acciaio (St)
Materiale: Ghisa (GG)

tipo	materiale	denti	bussola	foro max	dp	de	Df	Dm	Di	F	L	R	n° flangia	Kg.
16F	St	18	1108	28	54,57	53,81	60		38	31,0	22,0	9,0	308	0,20
16F	St	19	1108	28	57,61	56,84	63		38	31,0	22,0	9,0	309	0,32
16F	St	20	1108	28	60,64	59,88	66		45	31,0	22,0	9,0	310	0,41
16F	St	21	1108	28	63,67	62,91	71		45	31,0	22,0	9,0	311	0,45
16F	St	22	1108	28	66,70	65,94	75		48	31,0	22,0	9,0	312	0,47
16F	St	23	1108	28	69,73	68,97	79		52	32,0	22,0	10,0	313	0,50
16F	St	24	1108	28	72,77	72,00	79		52	32,0	22,0	10,0	313	0,64
16F	St	25	1108	28	75,80	75,04	83		54	32,0	22,0	10,0	314	0,68
16F	St	26	1108	28	78,83	78,07	87		60	32,0	22,0	10,0	315	0,70
16F	St	27	1108	28	81,86	81,10	87		60	32,0	22,0	10,0	315	0,83
16F	St	28	1108	28	84,89	84,13	91		65	32,0	22,0	10,0	316	0,85
16F	St	30	1210	32	90,96	90,20	97		71	32,0	25,0	7,0	318	0,90
16F	St	32	1210	32	97,02	96,26	103		75	32,0	25,0	7,0	320	1,05
16F	St	36	1610	42	109,15	108,39	115		86	32,0	25,0	7,0	323	1,40
16F	St	40	1610	42	121,28	120,51	127		96	32,0	25,0	7,0	327	1,65
17F	St	48	1610	42	145,53	144,77	152	92	120	32,0	25,0	7,0	334	2,80
19	St	60	1610	42	181,91	181,15		92	166	32,0	25,0	3,5		2,70
22	GG	72	2012	50	218,30	217,53		106	202	32,0	32,0			2,96
22	GG	84	2012	50	254,68	253,90		106	236	32,0	32,0			3,87
22	GG	96	2012	50	291,06	290,30		106	270	32,0	32,0			4,64
22	GG	120	2012	50	363,83	363,07		106	343	32,0	32,0			6,37