


PULEGGE DENTATE T 10 L.25

Pulley T 10 L. 25



CHAINS ITALY

T 10
PASSO 10 mm
 PER CINGHIA LARGHEZZA 25 mm

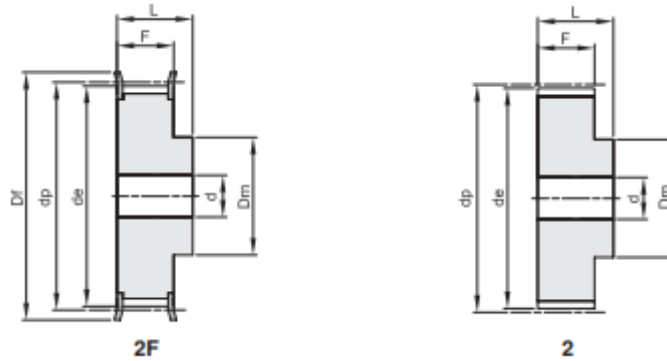

Materiale: Alluminio UNI 9006 - T6 (Al)
 adatto per l'ossidazione dura a spessore

tipo	materiale	denti	de	Df	Dm	F	L	d	n° flangia	Kg.
2F	Al	12	36,35	42	28	30	40	6	208	0,10
2F	Al	14	42,70	48	32	30	40	8	210	0,13
2F	Al	15	45,90	51	32	30	40	8	211	0,15
2F	Al	16	49,10	54	35	30	40	8	212	0,18
2F	Al	18	55,45	60	40	30	40	8	214	0,22
2F	Al	19	58,65	66	44	30	40	8	216	0,25
2F	Al	20	61,80	66	46	30	40	8	216	0,28
2F	Al	22	68,20	75	52	30	40	8	218	0,34
2F	Al	24	74,55	83	58	30	40	8	219	0,39
2F	Al	25	77,75	83	60	30	40	8	219	0,42
2F	Al	26	80,90	87	60	30	40	8	220	0,48
2F	Al	27	84,10	91	60	30	40	8	221	0,54
2F	Al	28	87,25	93	60	30	40	8	222	0,55
2F	Al	30	93,65	97	60	30	40	8	223	0,64
2F	Al	32	100,00	106	65	30	40	10	224	0,69
2F	Al	36	112,75	119	70	30	40	10	225	0,87
2F	Al	40	125,45	131	80	30	40	10	226	1,07
2	Al	44	138,20		88	30	40	10		1,35
2	Al	48	150,95		95	30	40	16		1,52
2	Al	60	189,15		110	30	40	16		2,34



OGNIBENE S.P.A. _ VIA DEL TIPOGRAFO, 6 _ 40138 BOLOGNA _ ITALY
 TEL: +39 051 534225 _ FAX: +39 051 535083
sales@ognibenechaintech.it _ www.ognibenechaintech.com